

# V&T INVERTER PRODUCT CATALOGUE

*Development from Accumulation,Achievement from Innovation  
Following Tide of the World,Forging Paradigm of Industry*

English Version: VX-20230612-H-4.0 (BOM:37110050) print for the first time  
This document is subject to change without notice. All rights reserved. Any unauthorized reproduction or copy is forbidden.



## V&T Technologies Co.,Ltd.

Headquarters Address: Kenuo Building, Kenuo Industrial Park, No. 7 Road, Tongguan Avenue, Guangming District, Shenzhen City,China.  
Post Code: 518055  
Company Tel: (+86)400-080-1199  
Market Department Tel: (+86)0755-26580820  
Service Department Tel: (+86)0755-26580830  
Fax: (+86)0755-26580821  
Website: <http://www.v-t.net.cn>  
E-mail: [overseas@v-t.net.cn](mailto:overseas@v-t.net.cn)

- V6 series high performance torque control inverter
- V5 series high performance vector control inverter
- E5 series high performance universal inverter
- High performance Electric Vehicle motor controller
- TS/VY series high performance synchronous/asynchronous servo drive
- V9-H Series General Purpose Inverter
- VTS General Purpose Inverter / Servo Drive



**V&T Technologies Co.,Ltd.**  
Listed Company,Stock Code:300484



## Company Introduction

Shenzhen V&T Technologies Co., Ltd. was certificated as a "National Hi-tech and Double-Software Enterprise", which has fully intellectual property rights and devotes to the R&D, manufacture, sales and technical service of Inverter, Servo Drive, Electric Vehicle Motor Controller, etc. V&T has won the "Technical Innovation" prize awarded by the Inverter Industry Association, "The Most Competitive Brands" prize awarded by China Electrical Association, "2012 Electric Vehicle Excellent Technology" prize respectively awarded by China Electro-technical Society (CES), the Specialized Committee of Electric Vehicles, the Automotive Engineering Society of China, and the Branch Association of Electric Vehicles. V&T has been ranked as one of the "Top 10 Chinese Inverter Enterprises". V&T successfully listed on the Stock Exchange of China in 2016 (stock code: 300484).

In regard to core and mainstream motor control technologies, Shenzhen V&T Technologies Co., Ltd. has mastered both advanced "Vector Control" and "Torque Control" technology so far. Through continuous technological innovation, international technical exchange and cooperation with other countries, V&T has completely grasped the key control technique, also possesses the capacity of industrialization design and manufacturing. Company has developed and reserved many product series. The product voltage grade mainly contains 200V, 400V, 690V, 1140V, and the power grade varies from 0.4kW to 3000kW, which could meet various application demands for high, medium and low-end market.

Under the premise of meeting international standards and satisfying different industries' application requirements, we further strengthened the product reliability and environment adaptability to suit harsh and extreme environments. Customized product and industrialized design can better meet medium and high-end application demands. The products have been widely used in electric vehicles, metallurgy, crane, oil, chemicals, machine tools, metal processing, building materials, stone, wood processing, ceramics, plastics, air compressor, washing machine, water supply, air conditioning, municipal engineering, textile, printing, mining, solar pump and other industries.

## Main Product Series

### Product Series

- TS series high performance synchronous motor servo drive. (Voltage Grade: 200V, 400V. Power Range: 0.4kW~200kW)
- V6 series high performance torque control inverter. (Voltage Grade: 400V, 690V. Power Range: 0.4kW~500kW)
- V5 series high performance vector control inverter. (Voltage Grade: 200V, 400V, 690V, 1140V. Power Range: 0.4kW~3MW)
- E5 series general purpose vector control inverter. (Voltage Grade: 200V, 400V, 690V, 1140V. Power Range: 0.4kW~3MW)

### Special Purpose Product Series

- |  |  |   |
|--|--|---|
| • Electric vehicle motor controller              | • Special purpose inverter for tension control   | • Servo drive   |
| • Special purpose inverter for crane             | • Special purpose drive for solar-powered pumps  | • Asynchronous servo drive                              |
| • Special purpose inverter for mine winch        | • Integrated energy-saving control cabinet       | • Special purpose inverter for air compressor           |
| • Special purpose inverter for water supply      | • Special inverter for stone processing industry | • Special purpose inverter for textile spinning machine |
| • Special purpose inverter for ceramic industry  | • High frequency inverter (max 3200Hz)           | • Special purpose inverter for centrifugal machine      |
| • Special purpose inverter for printing industry | • Special purpose inverter for music fountain    | • Explosion-proof inverter (690V/1140V)                 |



With the dedicated spirit of continuous R&D and technology to promote evolution in the last decade, Shenzhen V&T Technologies Co., Ltd. was officially listed on the Growth Enterprise Market (GEM) of Shenzhen Stock Exchange (SSE) on March 22, 2016 (stock name "LHHT", stock code: "300484")






# Applications of Typical Industries



## Electric Vehicle Drive

- Prominent structure design of high protection level, simple and convenient wiring
- Accurate torque control perfectly matches with engine working
- Energy saving mode, super battery endurance
- Professional built-in CAN-BUS adapter card of cars



## Injection molding industry

- There are 2 ways of solutions to be chosen: Integrated Energy-Saving Control Cabinet or specific inverter for Plastic Machine
- The motor drive solution can be chosen as optional: asynchronous servomotor solution or synchronous servomotor solution with double closed-loop control
- No high-pressure throttle and loss of overflowed energy, energy-saving rate can reach to 25%~70%
- Design of independent duct makes rear parts and top fan can be convenient to disassemble and easy to maintain; it has strong environmental adaptability and high protection level as well

## Air Compressor Industry

- High precision vector frequency conversion; Closed-loop constant pressure control; Multi-machine networking control
- Energy saving rate can reach to 20%~50%; Intelligent sleeping and low voltage awakening
- Standard inverter solution, specific converter solution for air compressor, integrated cabinet solution for air compressor energy saving are optional



## Machine Tool Industry

- Supporting 1000Kbps high-speed communication
- Drive spindle 180 thousand rpm successfully to operate
- For the spindle closed-loop control: the inverter with orientation servo features
- For the spindle open-loop control: diversified vector control methods to adapt to various machine tools



## Printing And Packaging Industry

- High performance vector control and torque control technology can achieve the constant linear speed control and constant tension control
- Applicable for devices of cutting machine, coating machine, paper-made machine, printing machine, compound machine, rolling dyeing machine, etc.
- Torque control without encoder speed feedback and it can replace torque motor widely



## Municipal Engineering

- Central air conditioning/refrigeration house: for constant temperature control, high efficiency of energy-saving, and low noise
- Centralized water supply in constant pressure: Built-in one-for-all expansion card for water supply, multi-period water supply in constant pressure with timing loop, solving the phenomena of overflowing and water hammer in the switching process
- Sewage treatment: Built-in adaptive torque control in the main and auxiliary drive of centrifugal equipment for quick acceleration and deceleration, suitable for harsh environment
- Various fan drives: Designed for the fan, high efficiency of energy-saving, noise optimization, built-in automatic speed tracking function, maximum power up to 800kW



## Crane

- Excellent torque control, reliable brake control sequence;
- Professional crane control functions: speed monitoring, torque monitoring, torque verification, power optimization, position processing, intelligent deceleration, etc.
- Extensively apply to: port, shipping, ocean engineering, mine, architecture, metallurgy, factory and various kinds of industries' lifting machines.



## Stone Processing

- Simple and convenient operation, less connection line
- Smooth running curve to reduce the board damage rate, smooth starting to reduce mechanical damage and maintenance costs
- Providing the constant tension control for broken rope, main and auxiliary functions for frequency operation, safe stopping function, and alarm prompt function



## Wood Processing

- Built-in technology algorithm of rotary cutting machine, rolling machine, peeling machine
- Wide voltage range, particularly suitable for harsh conditions in the rural power grid
- High precision and fast rotary cutting to increase the yield under the premise of keeping the uniformity of thickness for the wood veneer
- Stable and reliable work makes customers enjoy quality green power



## Oil Field

- Special inverter for pumping unit, do not need energy feedback or dynamic braking
- Higher power saving effect, less harmonic and reactive current
- Select high quality Outdoor Control Cabinet Box products constant temperature control box can be long-term working reliably in the field of high and low temperature
- Rich and flexible monitoring function can wirelessly transmit inverter data or record data through relevant storage medium



## Explosion-proof Products

- Passed National Detection and Testing Certificate
- Various voltage levels of products 200/400/690/1140V
- Wide operating voltage, continuously operating in low voltage and interference electricity, strong environmental adaptability
- Supporting automatic restart when power resume normal

## Mine Winch



- Abundant experience in the renovation of winch, providing different types of winch renovation solutions
- Vector technology platform providing excellent control performance for the winch
- A variety of protection functions to ensure more secure and reliable system
- Intelligent fault diagnosis to reduce maintenance and repair work

## Industry EPS



- Adopting digital control technology of DSP and CPLD and high efficiency technology of IGBT, higher reliability, lower loss
- Superior load characteristic, tracking synchronously, sinusoidal output, switching on line
- Man-machine interface of LCD, perfect function of protection, convenient to use
- Dynamic characteristics of high performance and the shortest switching time is less than 3ms




## Textile industry

- Reducing the rate of breakage and improving the efficiency of production
- Specially made external heat radiator, cotton easy clean
- Unique function of swing frequency is suitable for equipment of yarn winding
- Rich indication signals: full indication, broken wire indication, power failure indication, etc.




V&T Technologies Co., Ltd.  
WWW.vectorque.com

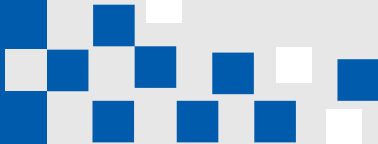

Technical Specifications

Control characteristics	Control mode	Vector control 1 without encoder speed feedback	Vector control 2 without encoder speed feedback	Vector control 2 with encoder speed feedback
	Starting torque	0.50Hz 180%	0.25Hz 180%	0.00Hz 180%
	Range of speed regulation	1:100	1:200	1:1000
	Precision of steady speed	± 0.5%	± 0.2%	± 0.02%
	Torque control	NO	YES	YES
	Torque control precision	—	± 5%	± 5%
	Torque response time	—	<20ms	<10ms
General functions	Key functions	Under-voltage regulation, switching of start command source, speed tracing function, torque limitation, multi-step frequency reference (up to 23 stages), motor parameters auto-tuning, S curve acceleration and deceleration, slip compensation, PID regulation, droop control, current limitation, on-line switching of torque control and speed control, manual torque boost and auto torque boost, multi-function input and output terminals.		
	Frequency reference modes	Operation panel setting, multi-function input terminal setting, Up/Dn setting(operation panel or terminal ),communication setting, analog setting(AI1/AI2/AI3) , high speed pulse setting(DI terminal)		
	Frequency range	0.00~300.00 Hz Note: Frequency range between 0.0~3000.0Hz, can be customized according to customers' requirements under vector control 1		
	Start-up frequency	0.00~60.00Hz		
	Acceleration time and deceleration time	0.1~3600.0s or 1~36000s, can be chosen as option		
	Dynamic braking capacity	Braking unit action voltage:650~750V; Operation period: 100.0s Braking unit can be built-in under V6-H-4T-75G/90L and below power class		
	DC braking capability	DC braking initial frequency: 0.00-300.00Hz DC braking current: Constant torque 0.0 -120.0%; Variable torque 0. 0 -90.0% DC braking time: 0.0~30.0s, without initial waiting time for DC braking to realize quick braking		
	Magnetic flux braking function	Action or no action is optional, action during deceleration as default		
Unique Characteristics	Multi-functional button M	The unique multifunction key can be set to the frequently used operations, such as JOG, emergency shutdown, running command source switching , display menu switching ,etc.		
	Multi menu mode	Basic menu mode, fast menu mode, menu mode of non-factory setting function codes		
	Parameters copy	The standard digital panel can realize the parameters uploading, downloading and display the copy progress. Users can select to forbid the overwriting of the uploaded parameters.		
	Show/hide function code	Users can customize any function code to be shown or hidden		
	Double 485 communication ports	Dual 485 communication ports support Modbus protocol (RTU). The standard digital panel can realize the function of a remote control box within 500m		
	Operation panel	Button or shuttle type digital panel optional, protection level: offered in IP20 as standard, offered in IP54 as option		
	Common DC-BUS	All series can realize common DC-BUS supply for several inverters		
	Independent duct	All series adopts independent duct design and supports the installation of heat-sink outside the cabinet		
Protection function	Power On Self-Test (POST)	Realizing the POST of internal and peripheral circuits, including motor grounding, +10V power supply output, analog input, disconnection etc.		
Efficiency		Power supply under-voltage, over-current protection, over-voltage protection, interference protection, abnormal comparison reference input, auto-tuning failure, module(IPM) protection, heat sink overheating protection, inverter overload protection, motor overload protection, peripheral protection, abnormal current detection, output to ground short circuit, abnormal power failure during operation, abnormal input power, output power phase failure, abnormal EEPROM operation, abnormal relay contact, temperature sampling disconnection, encoder disconnection, abnormal +10V power supply output, abnormal analog input, motor overheating (PTC), abnormal communication, abnormal version compatibility, abnormal copying, abnormal expansion card connection, terminal mutual exclusion detection failure, hardware overload protection		
Environmen	At rated power, 7.5kW and below, ≥93%;11kW~45kW, ≥95%,55kW and above, ≥95%			
	Operating site	The product shall be mounted vertically in the electric control cabinet with good ventilation. Horizontal or other installation modes are not allowed. The cooling medium is the air. The product shall be installed in the environment without dust, corrosive gas, combustible gas, oil mist, steam, drip and free from direct sunlight,		
	Ambient temperature	-10~+40°C; Derated at 40~50°C, the rated output current shall be decreased by 1% for every temperature rise of 1°C		
	Humidity	5~95%, no condensing		
	Altitude	0~2000m;Derated above 1000m, the rated output current shall be decreased by 1% for every rise of 100m		
	Vibration	3.5m/s2, 2~9Hz;10 m/s2,9~200Hz;15 m/s2,200~500Hz		
Storage temperature		-40~+70°C		

Product Model Description

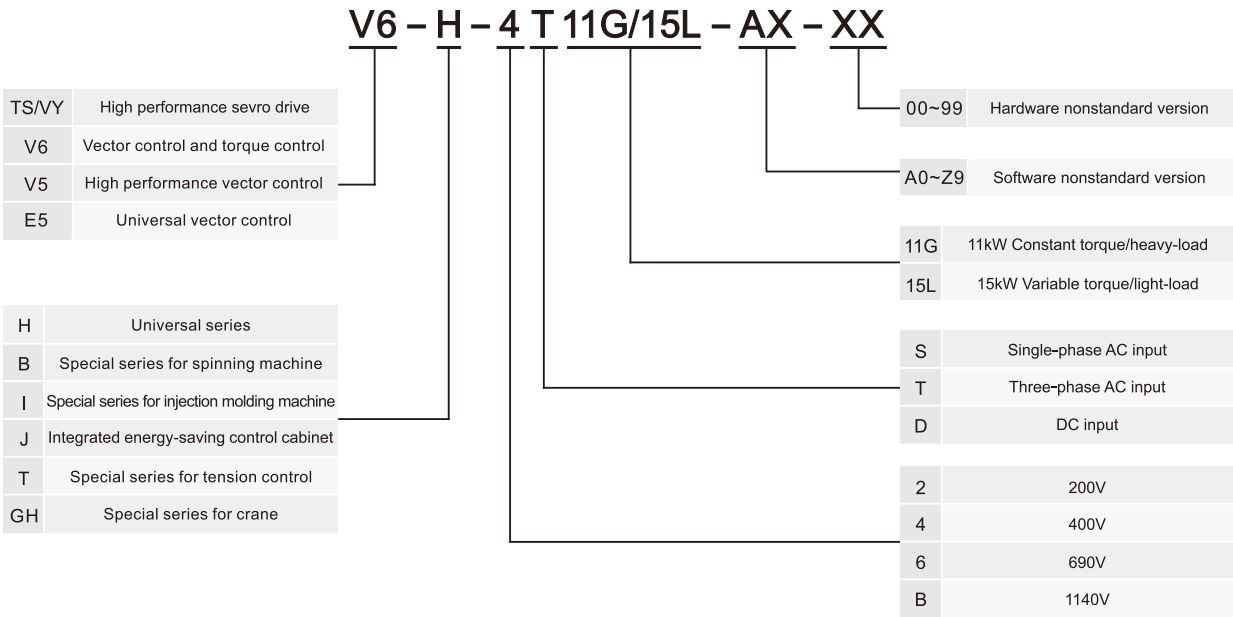

Typical Industry Selection Table

Industrial Application	Equipment	Type	Characteristics
Standard series product	V6 series: high performance torque control inverter;V5 series: high performance vector control inverter;E5 series: high performance universal inverter.All Series support 200V, 400V and 690V voltage input, maximum power up to 3MW.		
Stone, brick,wood	Wood planning machine	V5–H	High speed stabilization precision,large torque, high finished product rate
Plastic Metal Extrusion Processing	Extruder	V5–H	Large extrusion pressure,without tripping, discharge and flow uniform
	Die casting machine	V5–H	Rapid response and large torque, multi-pump and good synchronization performance
Textile industry	Knitting machine	V5–H	Large start torque, wide voltage fluctuation adaptability
Metal processing	Wire drawing machine	V6–H	Stretching control smooth, Take-Two options are available with or without pendulum
	Micro wire drawing machine	V5–H	Can stretch 0.001mm filaments
	Replace torque motor wire collection	V6–H	Extensive use, first open-loop tension control
Fans & pumps, air conditioning, air compressor	Fan	E5–H	Support built-in speed tracking card
	Water supply(1 inverter drive 1 motor)	E5–H	Closed-loop, sleep wake, and overpressure protection functions
	Central air conditioning/Cold storage	E5–H	Realize constant temperature control , high energy saving
	Compressor integration	V5–H	Small and high efficient, national popular inverter compressor suite
Printing and packing machine	Plastics blow molding machine	V5–H	Super rapid acceleration and deceleration performance, ensure product consistency
	Leather paring machine	V6–H	Open loop torque control, smoothly switch with speed control and torque control
	Fishing net machine	V6–H	Open torque control, for wire fishing net
	Paper machine	V6–H	Bus control acts as executive body, multi-point transmission
Lifting machine	Paper cutting machine	V6–H	Fast response the frequency reference, cutting with high speed, large torque and high precision
	Mine winch	V5–H	Run stably and reliably, working together with mechanical brake to realize mid-slope stop and start
	Ship crane/crane	V5–H	Wide range voltage, low voltage or voltage fluctuation can work continuously, environmental adaptabilitye
	Belt conveyor	V5–H	Multi-speed transmission, excellent synchronization performance, large torque under low-speed, strong load capability
Oilfield machine	Building lifting machine	V5–H	Large lifting torque, high energy saving
	Oil transfer pump/sand pump	V5–H	With zero frequency function, you can auto start and shutdown according to the conditions
	Single EPS	V5–H	Reliable short-circuit protection, running with auto reset, additionally,running with 50Hz heat cut into motor
Industrial supplies and external power supply operation	System EPS	V5–H	Mature system solution, 3ms synchronization traces AC
	Ceramic machine	V5–H	Running reliably and steadily, with anti-corrosion treatment
Other applications	Mechanical vibration generator system	V5–H	Ultra fast acceleration and deceleration performance, excellent motor change direction control
	Pile drive	V5–H	High energy saving efficiency, large torque, easy to change speed
	Mixer	V5–H	"Bulldozer" feature, not trip, excellent IGBT control and protection

Note:If you have any requirement, please contact with manufacturer.



## Universal Series

## V5-H Series Three-phase 690V Constant torque/heavy-load application


Type (V5-H-6T□□□G)	15	18.5	22	30	37	45	55	75	90	110	132	160	185	200	220
Motor power(kW)	15	18.5	22	30	37	45	55	75	90	110	132	160	185	200	220
Voltage (V)	Three-phase 0 to rated input voltage														
Output Rated current (A)	20	25	28	35	45	52	65	86	98	120	150	176	204	220	245
Overload capacity	150% 1 minute, 180% 10 seconds, 200% 0.5 second														
Rated voltage/frequency	Three-phase 690V/790V; 50Hz/60Hz														
Input Allowable voltage range	587V ~ 793V; Voltage unbalancedness ≤3%; allowable frequency fluctuation: ±5%														
Rated current (A)	25	30	35	40	47	52	65	85	96	116	145	168	196	210	230
Braking unit	Built-in as option								External braking unit needed						
Protection class	IP20														
Cooling mode	Forced air cooling														
Type (V5-H-6T□□□G)	250	280	315	355	400	450	500	560	630						
Motor power(kW)	250	280	315	355	400	450	500	560	630						
Voltage (V)	Three-phase 0 to rated input voltage														
Output Rated current (A)	275	325	350	395	435	490	545	600	680						
Overload capacity	150% 1 minute, 180% 10 seconds, 200% 0.5 second														
Rated voltage/frequency	Three-phase 690V/790V; 50Hz/60Hz														
Input Allowable voltage range	587V ~ 793V; Voltage unbalancedness ≤3%; allowable frequency fluctuation: ±5%														
Rated current (A)	255	290	335	378	415	466	520	580	655						
Braking unit	External braking unit needed														
Protection class	IP20														
Cooling mode	Forced air cooling														

**V5-H,V6-H Series Single-phase/Three-phase 200V Constant torque/heavy-load application**


Type (V5/6-H-2T□□□G)	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55
Motor power(kW)	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55
Voltage (V)	Three-phase 0 to rated input voltage														
Output Rated current (A)	3	5	7.5	10	17	24	32	46	64	71	87	115	145	175	215
Overload capacity	150% 1 minute, 180% 10 seconds, 200% 0.5 second, interval: 10 minutes (inverse time lag feature)														
Rated voltage/frequency	Three/single-phase 200V/240V Three-phase 200V/240V; 50Hz/60Hz														
Input Allowable voltage range	180V ~ 260V; Voltage unbalancedness ≤3%; allowable frequency fluctuation: ±5%														
Rated current (A)	3.8	5.5	8.3	12	18.5	26	35	51	70	78	95	124	156	185	230
Braking unit	Built-in as standard										Built-in as option				
Protection class	IP20														
Cooling mode	Self-cooling		Forced air cooling												
Type (V5/6-H-2T□□□G)	75	90	110	132											
Motor power(kW)	75	90	110	132											
Voltage (V)	Three-phase 0 to rated input voltage														
Output Rated current (A)	283	346	432	520											
Overload capacity	150% 1 minute, 180% 10 seconds, 200% 0.5 second, interval: 10 minutes (inverse time lag feature)														
Rated voltage/frequency	Three-phase 200V/240V; 50Hz/60Hz														
Input Allowable voltage range	180V ~ 260V; Voltage unbalancedness ≤3%; allowable frequency fluctuation: ±5%														
Rated current (A)	298	365	445	530											
Braking unit	External braking unit needed														
Protection class	IP20														
Cooling mode	Forced air cooling														

Note: If you have any requirement, please contact with manufacturer.



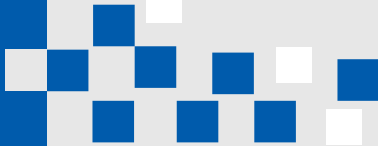

Product Outline, Mounting Dimension, and Weight

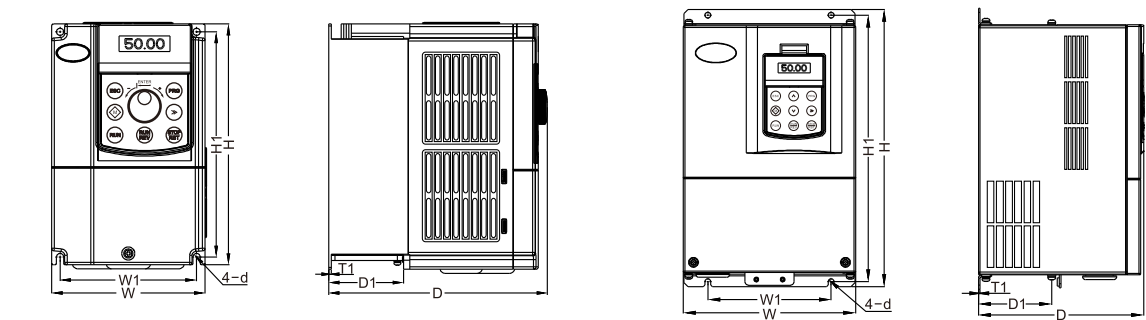

V5/V6-H-2T3.7G and below power range  
V5/V6-H-4T7.5G/11L, E5-H-4T7.5G and below power range  
V5-H-6T15G and above power range  
V5/V6-H-2T5.5G and above power range  
V5/V6-H-4T11G/15L, E5-H-4T11G and above power range



Voltage class	Inverter type	Outline and mounting dimension (mm)								Approximate weight(kg)	Type of main circuit terminal
		W	H	D	W1	H1	D1	T1	d		
200V	V□-H-2T0.4G	118	190	155	105	173	40.8	3	5.5	1.5	A
	V□-H-2T0.75G			175			60.5	4		2.2	
	V□-H-2T1.5G			155			40.8	3		1.5	
	V□-H-2T2.2G			175			60.5	4		2.2	
	V□-H-2T3.7G	155	249	185	136	232	69	8	5.5	3	A
	V□-H-2T5.5G	210	337	200	150	324	107.5	2.5	7	8.5	A
	V□-H-2T7.5G										
	V□-H-2T11G										
	V□-H-2T15G	285	440	220	200	425	107.5	2.5	7	17	B
	V□-H-2T18.5G										
	V□-H-2T22G	315	575	227	220	553	123.5	2.5	10	25	B
	V□-H-2T30G	400	615	265	270	590	123.5	3.0	10	35	B
	V□-H-2T37G										
	V□-H-2T45G	465	745	325	343	715	156	3.0	12	55	C
	V□-H-2T55G										
	V□-H-2T75G	540	890	385	370	855	205.5	4.0	14	85	C
	V□-H-2T90G										
	V□-H-2T110G	700	1010	385	520	977	210	4.0	14	125	
	V□-H-2T132G										
400V	V□-H-4T0.75G/1.5L, E5-H-4T0.75G	118	190	155	105	173	40.8	3	5.5	1.5	A
	V□-H-4T1.5G/2.2L, E5-H-4T1.5G	118	190	175	105	173	60.5	4	5.5	2.6	A
	V□-H-4T2.2G/3.7L, E5-H-4T2.2G										
	V□-H-4T3.7G/5.5L, E5-H-4T3.7G										
	V□-H-4T5.5G/7.5L, E5-H-4T5.5G	155	249	185	136	232	69	8	5.5	3	A
	V□-H-4T7.5G/11L, E5-H-4T7.5G										
	V□-H-4T11G/15L, E5-H-4T11G	210	337	200	150	324	107.5	2.5	7	8.5	A
	V□-H-4T15G/18.5L, E5-H-4T15G	285	440	220	200	425	107.5	2.5	7	17	B
	V□-H-4T18.5GA/22LA, E5-H-4T18.5GA										
	V□-H-4T22GA/30LA, E5-H-4T22GA										
	V□-H-4T30GA/37LA, E5-H-4T30GA										

Product Outline, Mounting Dimension, and Weight

Voltage class	Inverter type	Outline and mounting dimension (mm)								Approximate weight(kg)	Type of main circuit terminal
		W	H	D	W1	H1	D1	T1	d		
400V	V□-H-4T37GA/45LA, E5-H-4T37GA	315	575	227	220	553	123.5	2.5	10	25	B
	V□-H-4T45GA/55LA, E5-H-4T45GA	400	615	265	270	590	123.5	3.0	10	35	B
	V□-H-4T55GA/75LA, E5-H-4T55GA										
	V□-H-4T75GA/90LA, E5-H-4T75GA	465	745	325	343	715	156	3.0	12	55	C
	V□-H-4T90G/110L, E5-H-4T90G										
	V□-H-4T110G/132L, E5-H-4T110G	540	890	385	370	855	205.5	4.0	14	85	C
	V□-H-4T132G/160L, E5-H-4T132G										
	V□-H-4T160G/185L, E5-H-4T160G										
	V□-H-4T185G/200L, E5-H-4T185G										
	V□-H-4T200G/220L, E5-H-4T200G										
	V□-H-4T220G/250L, E5-H-4T220G										
	V□-H-4T250G/280L, E5-H-4T250G	700	1010	385	520	977	210	4.0	14	125	C
	V□-H-4T280G/315L, E5-H-4T280G										
	V□-H-4T315G/355L, E5-H-4T315G	810	1358	425	520	1300	210	4.0	14	215	C
	V□-H-4T355G/400L, E5-H-4T355G										
	V□-H-4T400G/450L, E5-H-4T400G										
	V□-H-4T450G/500L, E5-H-4T450G										
	V□-H-4T500G/560L, E5-H-4T500G										
690V	V5-H-6T15G	285	440	220	200	425	107.5	2.5	7	17	B
	V5-H-6T18.5G										
	V5-H-6T22G										
	V5-H-6T30G										
	V5-H-6T37G	315	575	227	220	553	123.5	2.5	10	25	B
	V5-H-6T45G										
	V5-H-6T55G										
	V5-H-6T75G	400	615	265	270	590	123.5	3.0	10	35	B
	V5-H-6T90G										
	V5-H-6T110G	465	745	325	343	715	156	3.0	12	55	C
	V5-H-6T132G										
	V5-H-6T160G	540	890	385	370	855	205.5	4.0	14	85	C
	V5-H-6T185G										
	V5-H-6T200G										
	V5-H-6T220G										
	V5-H-6T250G										
	V5-H-6T280G	700	1010	385	520	977	210	4.0	14	125	C
	V5-H-6T315G										
	V5-H-6T355G										
	V5-H-6T400G	810	1358	425	520	1300	210	4.0	14	215	C
	V5-H-6T450G										
	V5-H-6T500G										
	V5-H-6T560G										
	V5-H-6T630G										

Note: V□ indicates V5 or V6 series inverter.



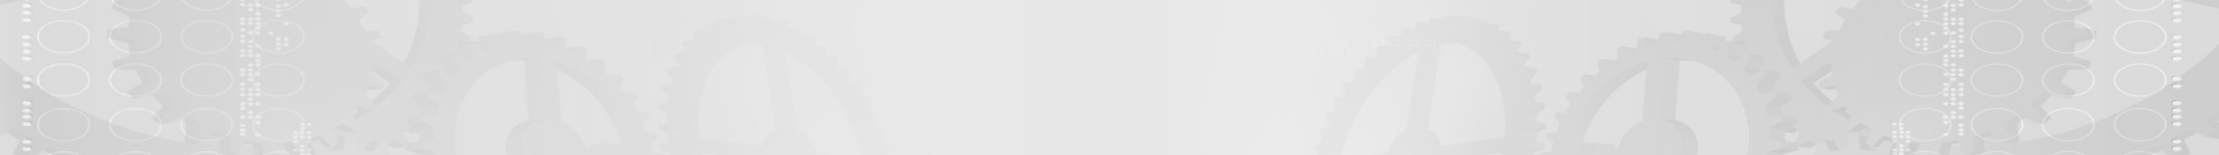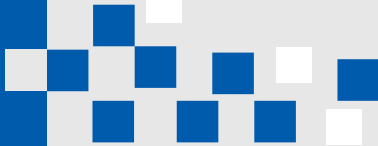

Functions of Main Circuit Terminal

Type A

R/L1	S/L2	T/L3	⊕1	⊕2/B1	B2	⊖	U/T1	V/T2	W/T3
POWER			OPTION			MOTOR			



Type B

R/L1	S/L2	T/L3	⊕1	⊕2	⊖	U/T1	V/T2	W/T3
POWER			OPTION			MOTOR		



Type C

POWER		
R/L1	S/L2	T/L3



⊕1	⊕2	⊖
OPTION		



U/T1	V/T2	W/T3
MOTOR		

V□-H-2T15G-06~V□-H-2T45G-06、V5/V6-□-4T18.5GA/22LA-06~V5/V6-□-4T75GA/90LA-06、V5-H-6T15G-06 ~ V5-H-6T90G-06(-06 indtcate built-in braking unit)

R/L1	S/L2	T/L3	B1	B2	⊖	U/T1	V/T2	W/T3
POWER			OPTION			MOTOR		



Terminal symbol	Terminal name and function description
R/L1,S/L2,T/L3	Three-phase AC power input terminal
⊕1,⊕2/B1 or ⊕1,⊕2	DC reactor connecting terminal, 4T90G/110L and below power class short circuited with copper bus upon delivery
⊕2/B1,B2 or B1,B2	Connecting terminal of braking resistor
⊕2/B1,⊖ or ⊕2,⊖	DC power input terminal; DC input terminal of external braking unit
U/T1,V/T2,W/T3	Three-phase AC power output terminal
⊕	Grounding terminal PE

Note:V□ indicates V5, V6 series inverter.


Optional Accessories

Accessories name		Type	Function description
Built-in braking unit		Type with “-06”	Built-in braking unit from 18.5kW to 75kW is optional and support common DC bus
		Type with “-26”	Built-in braking unit from 18.5kW to 75kW is optional and support external DC reactor
485 Communication		Type with “-34”	E5 Series increase 485 and high speed pulse terminals
Vectorque monitoring software		CD-RM01	V1.00
PG01 feedback card		EX-PG01	A/B/Z Open collector input (12V)
PG02 feedback card		EX-PG02	A/B/Z Differential input (5V)
PG03 feedback card		EX-PG03	A/B/Z Open collector input with frequency division output (12V)
PG04 feedback card		EX-PG04	A/B/Z Differential input with frequency division output (5V)
PG06 feedback card		EX-PG06	U/V/W encoder input
PG07 feedback card		EX-PG07	Resolver input
Injection molding machine interface card 1		EX-PM01	Two-circuit isolation input 0-1A/0-2A/0-24V
Injection molding machine interface card 2		EX-PM02	Two-circuit isolation input 0-1A/0-2A
Digital terminal expansion card		EX-DT01	Externally expand four multi-function input terminals and three relay output terminals
		EX-DT02	Externally expand seven controllable relay output terminals.
Programmable clock control card		EX-DT03	I ndependent clock, has eight controllable relay output terminals.
Power Monitoring card		EX-PA01	Power lacks/instantaneous power-off monitor
Phase sequence detection card		EX-PA02	Three-phase input power phase sequence detection
Speed tracking card		EX-PA03	Realize speed tracking
External power rectifier bridge		EX-RF01	Control power provided by an external power supply
External capacitor box		EX-CB01	Expand inverter main circuit capacitance for users
Operation panel	Shuttle type	V6-DP01	7.5kW and below as standard
	Bottom type	V6-DP02	11kW and above as standard
	False panel	V6-DP03	Guest selection accessories
	Pallets	V6-DP04	Operation panel installation of accessories
Test display		EX-MT01	Man-machine interface - Text display
Touch screen		EX-MT02	Man-machine interface - Touch screen
Communication adapter		EX-CA06	PROFIBUS communication adapter
		EX-CA02	RS232 convert to RS485 communication adapterr
		EX-CA03	USB convert RS485 communication adapter
CANopen communication adapter card		EX-CA04	Support CAN2.0A, CANopen DS301 V4.02, DS303, Ds305
Keyboard extension line		CB1-150	1.5m Keyboard extension line
		CB1-300	3.0m Keyboard extension line
Communication cables		CB2-RS232	Standard RS232 cable
		CB3-USB	1.0m USB convert RS232 cable
Braking resistor		RXHG/RXLG series	Braking resistor Annex
DC reactor		DCL series	DC Reactor
AC input reactor		ACL series	AC input Reactor Annex
AC output reactor		OCL series	AC output Reactor Annex
Input noise filter		EBK5/40 series	CE specifications Annex
Output noise filter		EBL series	CE specifications Annex

Note:If you have any requirements, please feel free to contact us



## Terminal Wiring

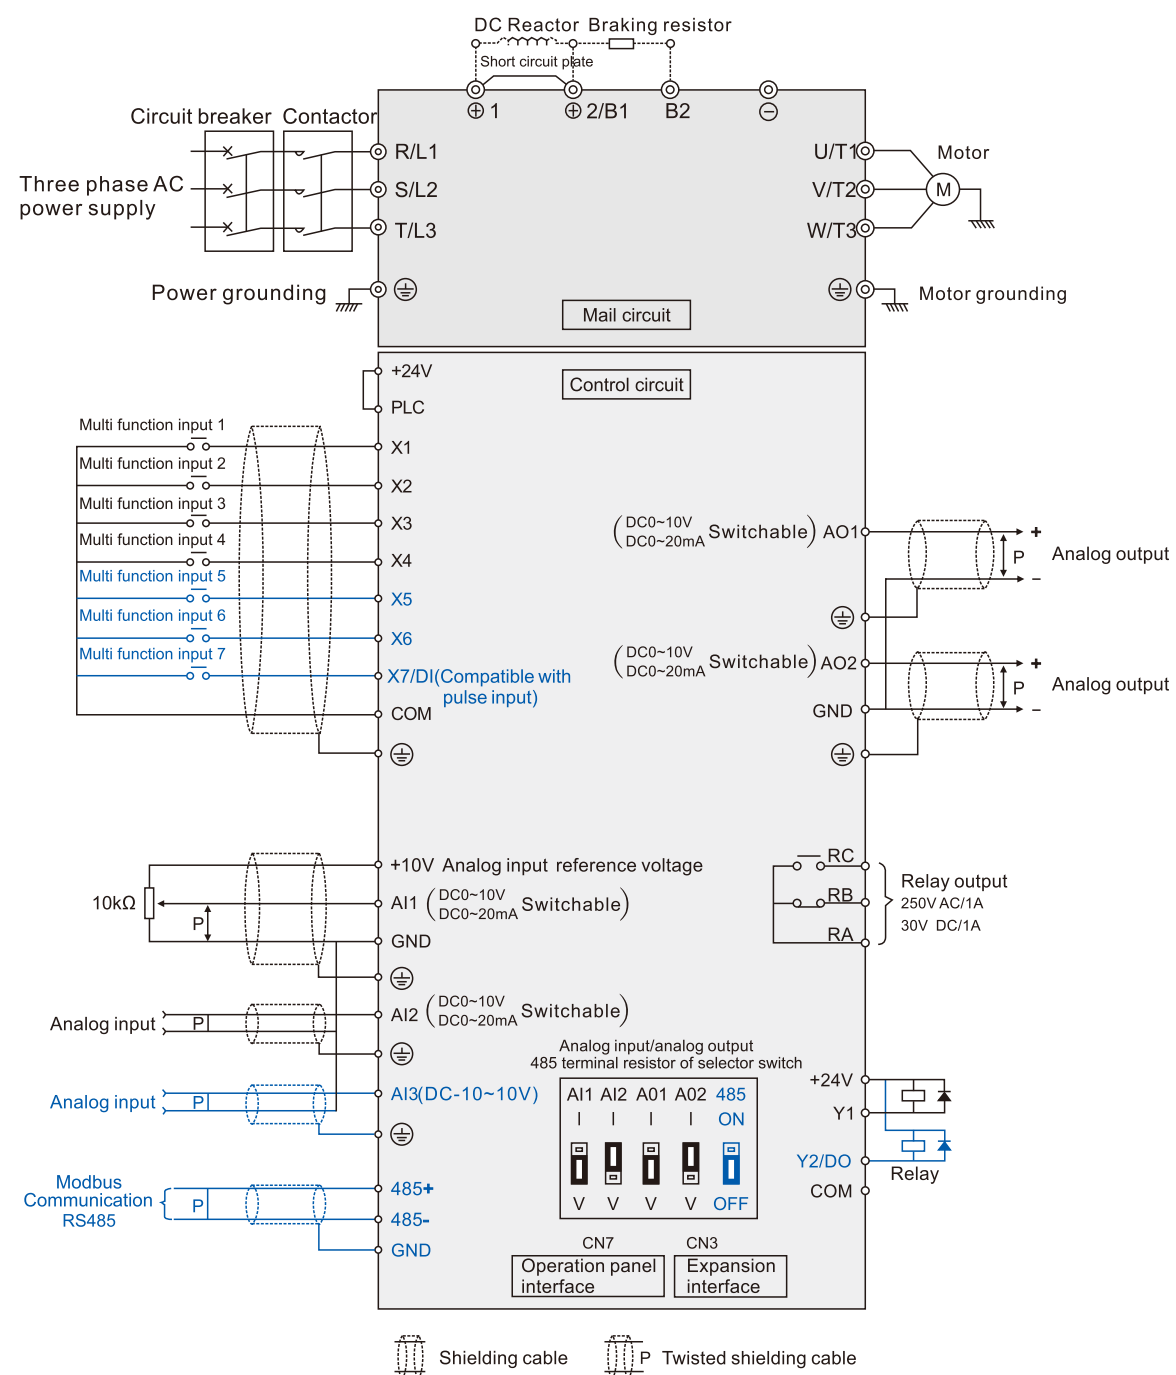

## Control Circuit Terminal

V5 and V6 series inverter control circuit terminal

+10V	AI1	AI2	AI3	GND	AO1	AO2	GND	485+	485-	RA	RB	RC
+24V	PLC	COM	X1	X2	X3	X4	X5	X6	X7/DI	Y1	Y2/DO	COM

E5 series inverter control circuit terminal

+10V	AI1	AI2		GND	AO1	AO2				RA	RB	RC
+24V	PLC	COM	X1	X2	X3	X4				Y1		COM

## Control Circuit Terminal Function

Type	Terminal symbol	Terminal function description	Technical specification
Terminal 485	485+	Positive end of 485 signal	Rate: 4800/9600/19200/38400/57600 bps Up to 32 inverter can be paralleled. If exceeds 32, relay shall be used Maximum distance: 500m (Adopt standard twisted shielding cable)
	485-	Negative end of 485 signal	
	GND	Grounding end of 485	Internal isolated with COM
Operation panel 485	CN7	485 port of operation panel	Connection of communication with host computer, it is the same as terminal 485 The maximum distance is 15m for the communication connection of operation panel (Adopt standard twisted shielding cable)
Digital input	+24V	+24V	24V±10%; Maximum load: 200mA, with overload and short circuit protection
	PLC	Common end of multi-functional input terminal	Short circuited with +24V upon factory setting
	X1~X6	Multi-functional input terminals	Input specification: 24VDC, 5mA; Frequency range: 0~200Hz; Voltage range: 24V±20%
	X7/DI	Multi-functional input or pulse input	Multi-functional input: same as X1~X6; Pulse input: 0.1Hz~50kHz; Voltage range: 24V±20%
Digital output	COM	+24V GND	Internal isolated with COM
	Y1	Open collector output	Voltage range: 24V±20%, maximum input current: 50mA
	Y2/DO	Open collector or pulse output	Open collector: Same as Y1; Pulse output: 0~50kHz; voltage range: 24V±20%
Analog input	COM	Open collector output common end	Internal isolated with GND
	+10V	Analog input reference voltage	10V ±3%, internal isolated with COM; Maximum output current: 10mA, with short circuit and overload protection
	AI1	Analog input channel 1	0~20mA: Input impedance 500Ω, maximum input current: 30mA 0~10V: Input impedance 20kΩ, maximum input voltage: 15V Resolution: 12 bits (0.025%)
	AI2	Analog input channel 2	
Analog output	AI3	Analog input channel 3	-10V~10V: Input impedance 20kΩ, Resolution: 12 bits (0.025%), Maximum input voltage: ±15V
	GND	Analog GND	Internal isolated with COM
	AO1	Analog output channel 1	0~20mA: allowable output impedance 200~500Ω 0~10V: allowable output impedance ≥10kΩ Output precision: 2%, resolution: 10 bits (0.1%), with short circuit protection function
	AO2	Analog output channel 2	
Relay output	GND	Analog GND	Internal isolated with COM
	RA/RB/RC	Relay output	RA-RB: Normally closed; RA-RC: Normally open, Contact capacity: 250VAC/1A, 30VDC/1A